

MBR-PE

Narrow Linewidth Ti:Sapphire Laser




Features

- Monolithic resonator
- Ti:Sapphire performance
- Optimized output couplers
- Minimum number of mirrors
- No external focussing optics
- Miniature optical diode

- Powered by Verdi™
- Birefringent filter
- Single thin etalon

Optical Schematic of the MBR-PE Ti:Sapphire Laser

Verdi 532 nm input

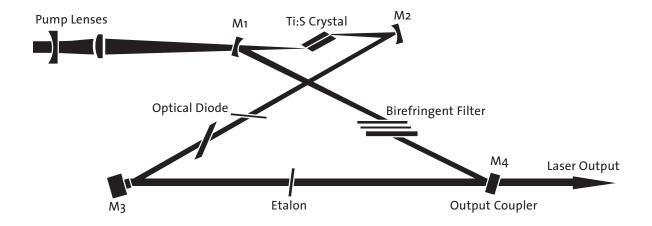

MBR-PE


Narrow Linewidth Ti:Sapphire Laser

System Specifications^{1,2}

Power (18W pump)(mW)	>3500
Power (10W pump)(mW)	>1500
Power (8W pump)(mW)	>1000
Power (6W pump)(mW)	>600
Power (5W pump)(mW)	>450
Tuning Range (18W pump)(nm)	700 to 1030
Tuning Range (10W pump)(nm)	700 to 1000
Tuning Range (8W pump)(nm)	700 to 970
Tuning Range (6W pump)(nm)	715 to 950
Tuning Range (5W pump)(nm)	720 to 940
Typical Linewidth (MHz)(rms)	<5
Typical Beam Divergence (full angle)(mrad)	1.7
Typical Beam Radius³ (mm)	0.28
Spatial Mode	TEM _{OO}
Polarization	Horizontal
Amplitude Noise ⁴ (rms)	<0.5%
Laser Head Dimensions (L x W x H)	630 x 310 x 160 mm (25.2 x 12.4 x 6.4 in.)
Cooling Requirements	Supplied closed loop chiller
The MRR-PE has been designed to operate with the Coherent Verdi numn laser only Please consult your Coherent representative	

¹ The MBR-PE has been designed to operate with the Coherent Verdi pump laser only. Please consult your Coherent representative if an alternative configuration is proposed.

Typical MBR Tuning Curves with Verdi Pump Sources

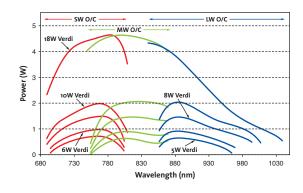

Coherent follows a policy of continuous product improvement. Specifications are subject to change without notice.

Coherent's scientific and industrial lasers are certified to comply with the Federal Regulations (21 CFR Subchapter J) as administered by the Center for Devices and Radiological Health on all systems ordered for shipment after August 2, 1976.

Coherent offers a limited warranty for all MBR systems. For full details of this warranty coverage, please refer to the Service section at www.Coherent.com or contact your local Sales or Service Representative.



Coherent, Inc.

5100 Patrick Henry Drive Santa Clara, CA 95054 (800) 527-3786 phone (408) 764-4983

fax (408) 764-4646

tech.sales@Coherent.com e-mail

Benelux +31 (30) 280 6060 China +86 (10) 8215 3600 France +33 (0)1 8038 1000 Germany/Austria/Switzerland

+49 (6071) 968 333 Italy +39 (02) 31 03 951 Japan +81 (3) 5635 8700

Korea +82 (2) 460 7900 +886 (3) 505 2900 UK/Ireland +44 (1353) 658 833



² Measured at the peak of the tuning curve.

³ At output window.

⁴ Measured 10 Hz to 10 MHz bandwidth (using Verdi pump).