


Retro-Reflective Sensor Model MCS-655P

GENERAL

The MCS-655P is a photo-reflective NPN open collector photo sensor with Light / Dark activated output that operates up to 1000 Hz. For simplified installation purposes the integral LED aids in alignment. Sensors also provide a sensitivity adjustment pot providing application flexibility. The MCS-655P model comes with a connection cable, LED status indicator, sensitivity control and mounting nuts.

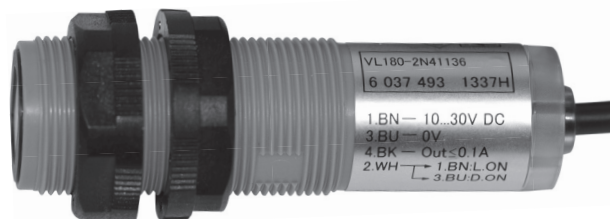


SPECIFICATIONS

Sensor/detection principle: Photoelectric retro-reflective sensor
Housing length: 2.5" (62.9 mm)
Housing thread diameter: M18 x 1
Sensing range: 2" - 23' (0.05 - 7 m)
Light/Source: Visible red LED
Light spot @ distance 19.7' (6 m): 15.75" (400 mm)
Wave length: 645 nm
Sensitivity adjustment: Turnable Potentiometer over 270°
Supply voltage: 10-30 V DC
Switching output: NPN open collector, Light/dark-switching, Selectable via L/D control wire
Signal voltage NPN HIGH/LOW: Approx. VS / <math>< 1.8 V</math>
Output current max.: ≤ 100 mA
Response time: ≤ 0.5 ms
Switching frequency: 1,000 Hz with light/dark ratio 1:1
Angle of dispersion: Ca. 4.5 °
Ambient Operating temperature: -13 to 131 °F (-25 to 55 °C)
Housing material: PBT and PC
Optics material: PMMA
Cable material: PVC
Connection type: Cable, 4-wire, 6.6' (2 m)
Circuit protection: inputs and output reverse-polarity protected; outputs overcurrent and short-circuit protected
Weight: 2.2oz (62 g)
Enclosure rating: IP 67
Items supplied: Fastening nuts (2 x), Reflector target, reflection tape

DIMENSIONS

1. Connection Cable
2. LED status indicator
3. Sensitivity control
4. Mounting nuts

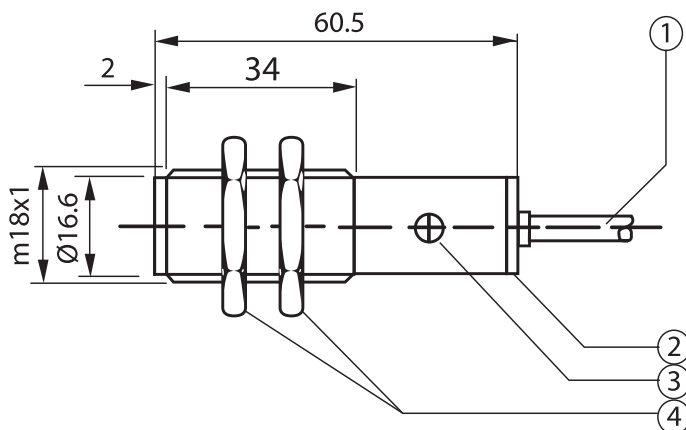

CONNECTIONS

- Brown - +10-30VDC
- Blue - 0V
- Black - Output (NPN open collector)
- White - Connect to Brown : Light Operate
Connect to Blue : Dark Operate