

# OBIS LX/LS Heat Sink

## Heat Sink with Fan for Thermal Management

OBIS LX and OBIS LS laser products come with a variety of accessories to support your application needs.

As with all OBIS LX and OBIS LS lasers, the laser itself offers a stand-alone all-in-one laser solution. The OBIS laser comes with a Power Connection, USB Connection, Fan Connection and a SDR-type Connection for laser control I/O. All of these are on the back panel of every OBIS LX/LS laser.

To simplify integration, the OBIS LX/LS accessories offer a separate Heat Sink with an integrated fan. The Heat Sink offers a convenient way to raise the laser beam height off the table and provide thermal management. The fan simply plugs into the back of the OBIS LX or OBIS LS laser to receive 12V DC power.



**Superior Reliability & Performance**

### **OBIS LX/LS Heat Sink Features:**

- **Small footprint**
- **Rugged design**
- **Precision dowel pin laser positioning**
- **Convenient 69 mm (2.7 inch) beam height**
- **Integrated cooling fan with vibration isolation**
- **Output beam centered on standard table bolt pattern**
- **Universal mounting to imperial or metric bolt pattern**
- **Proven stable performance over time and temperature**
- **Fan power connector plugs directly to OBIS Laser Head**
- **Laser can be mounted on top or side for opposite polarization**


# OBIS LX/LS Heat Sink

Heat Sink with Fan for Thermal Management


## Top and Side Mount Plug Holes

Allow for Heat Sink to be mounted in either direction. Need horizontal polarization – mount the Heat Sink with the laser on the side.

### Top Mount Plug Holes

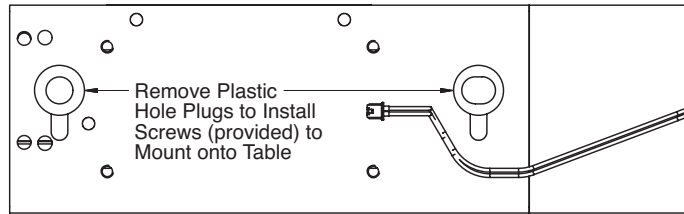

### Side Mount Plug Holes

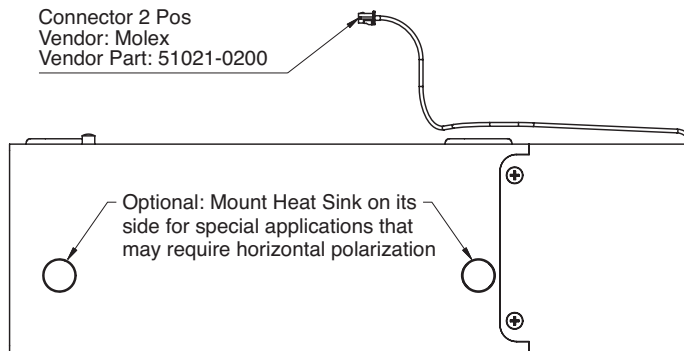

# OBIS LX/LS Heat Sink

Heat Sink with Fan for Thermal Management

## OBIS Laser Remotes

## Description




OBIS LX/LS Single Laser Remote with full features for control with analog/digital inputs. Includes USB and RS-232 on the Remote.



OBIS LX/LS 6-Laser Remote with CDRH features. Separate power switches and power cables for each laser.



OBIS LX/LS Scientific Remote with full features for control with analog/digital inputs for up to six lasers. User interface touch screen and connectivity through USB, RS-232 and Ethernet.

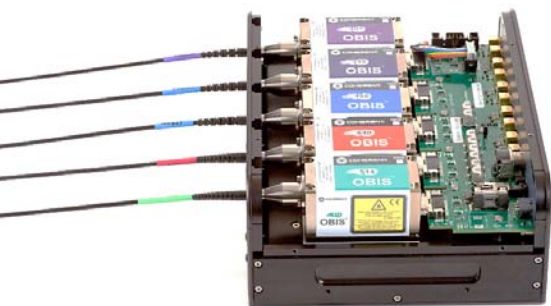

OBIS LX/LS Laser Box with five laser mounting bays with thermal management, cooling fans, analog/digital inputs, RS-232, USB, key-switch and interlock in one compact package. Lasers sold separately.


# OBIS LX/LS Heat Sink

Heat Sink with Fan for Thermal Management


## Mechanical Specifications

### OBIS LX/LS Heat Sink


### Top View

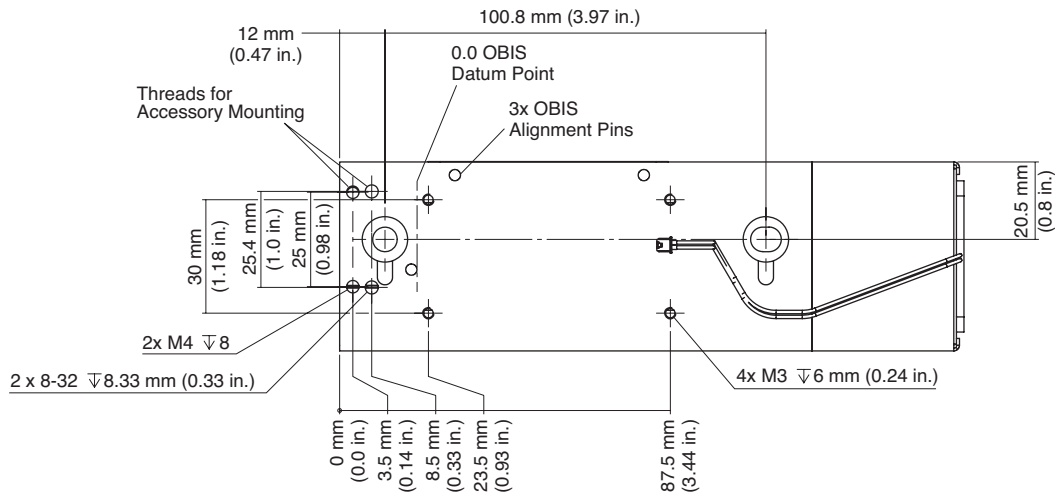


### Front View



### Side View

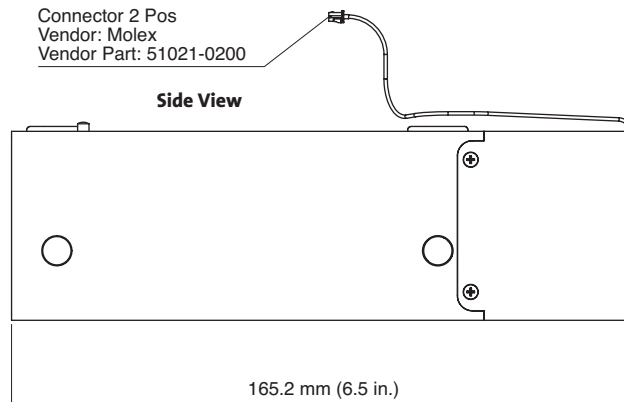

### Rear View



 **COHERENT**  
www.Coherent.com

**Coherent, Inc.,**  
5100 Patrick Henry Drive  
Santa Clara, CA 95054  
phone (800) 527-3786  
(408) 764-4983  
fax (408) 764-4646  
e-mail tech.sales@Coherent.com

Benelux +31 (30) 280 6060  
China +86 (10) 8215 3600  
France +33 (0)1 8038 1000  
Germany/Austria/  
Switzerland +49 (6071) 968 333  
Italy +39 (02) 31 03 951  
Japan +81 (3) 5635 8700  
Korea +82 (2) 460 7900  
Taiwan +886 (3) 505 2900  
UK/Ireland +44 (1353) 658 833

Coherent follows a policy of continuous product improvement. Specifications are subject to change without notice.

Coherent's scientific and industrial lasers are certified to comply with the Federal Regulations (21 CFR Subchapter J) as administered by the Center for Devices and Radiological Health on all systems ordered for shipment after August 2, 1976.

Coherent offers a limited warranty for all OBIS LX/LS Heat Sinks. For full details of this warranty coverage, please refer to the Service section at www.Coherent.com or contact your local Sales or Service Representative.