


# Polarization Maintaining Fiber

PMF-488-B1

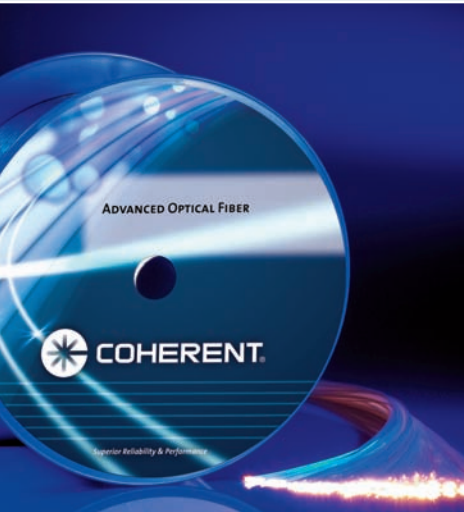

## Features

- High birefringence
- Low attenuation
- Bow-tie stress structure design
- Superior polarization maintaining properties
- Excellent product consistency

## Applications

- Fiber optic sensors
- Laser delivery in spectroscopy, medical and metrological applications
- Polarization-sensitive components

## Technical Specifications

### Product Code


### PMF-488-B1

Fiber Type	Bow-tie polarization maintaining fiber
Operating Wavelength (nm)	488
Cut-off Wavelength (nm)	<470
Mode Field Diameter at 488 nm (μm)	3.2 ±0.5
Numerical Aperture	0.13 nominal value
Attenuation at 488 nm (dB/km)	<100
Beat Length at 488 nm (mm)	<1.2
Outer Cladding Diameter (μm)	125 ±1
Coating Diameter (μm)	245 ±10
Core/Cladding Concentricity (μm)	<1.0
Proof Test Level (kpsi)	100
Coating Type	UV-cured dual acrylate

# Polarization Maintaining Fiber

## PMF-488-B1

### Cross-Section

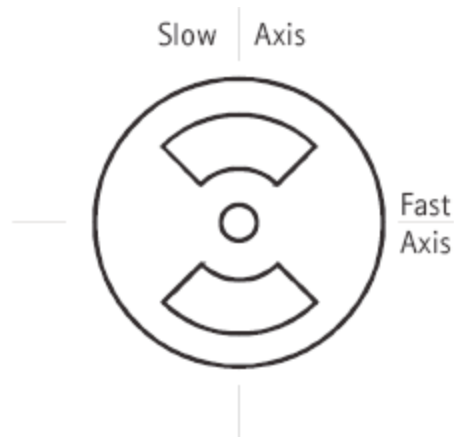

Coherent follows a policy of continuous product improvement. Specifications are subject to change without notice.

Coherent's scientific and industrial lasers are certified to comply with the Federal Regulations (21 CFR Subchapter J) as administered by the Center for Devices and Radiological Health on all systems ordered for shipment after August 2, 1976.

Coherent offers a limited warranty for all polarization maintaining fibers. For full details of this warranty coverage, please refer to the Service section at [www.Coherent.com](http://www.Coherent.com) or contact your local Sales or Service Representative.



**Coherent, Inc.,  
Corporate Headquarters**  
5100 Patrick Henry Drive  
Santa Clara, CA 95054

**Coherent Salem**  
32 Hampshire Road  
Salem, NH 03079  
phone (603) 685-0907  
fax (603) 893-5604  
e-mail [fiber@Coherent.com](mailto:fiber@Coherent.com)

Benelux +31 (30) 280 6060  
China +86 (10) 6280 0209  
France +33 (0)1 6985 5145  
Germany +49 (6071) 968 333  
Italy +39 (02) 34 530 214  
Japan +81 (3) 5635 8700  
Korea +82 (2) 460 7900  
UK +44 (1353) 658 833