

MICROLITULTIMUS

Bottle Top Dispenser with
Dual Inlet® Technology



We are World Leaders in Bottle Top Dispensing Technology

MICROLIT ULTIMUS is a Bottle Top Dispenser (BTD) that offers a sophisticated blend of features and functionality.

Built by our in-house team of product design engineers, it uses Dual Inlet®, an award-winning technology patented in India, the EU and the US.

It offers 4 liquid handling modes - rinsing, dilution, refilling, purging - without dismantling the dispenser. MICROLIT ULTIMUS also features two product innovations, EasyKnob® and FlexiNozzle® that enhance its ease of use and flexibility.

Designed with ergonomics and intuitive handling in mind, it exhibits excellent chemical compatibility and helps achieve precision with reliability in practical laboratory environments.

Experience the Power of Precision in Your Daily Laboratory Routine



Change Volume with EasyKnob®

EasyKnob® is a specially designed volume adjustment knob that allows 180° rotation for easy and effortless volume setting.



Move Effortlessly with a PTFE Piston

A PTFE Piston with FEP Tubing, an ETP O-Ring facilitates smooth and effortless movement and ensures high chemical compatibility.



Forget Dismounting with Dual Inlet®

MICROLIT ULTIMUS is equipped with an award-winning patented technology, Dual Inlet®, that enables 4 liquid handling modes without dismantling the dispenser.



Dispense Easily with FlexiNozzle®


FlexiNozzle® is an adjustable delivery nozzle. It offers a high degree of flexibility, facilitating easy dispensing in demanding laboratory conditions.



Work Flexibly with a 360° Adapter

A specially designed Adapter allows 360° rotation, facilitating complete work flexibility.

- **Autoclaving Parameters**
MICROLIT ULTIMUS is fully autoclavable at 121 °C and 15 psi for a duration of 10 - 15 minutes.
- The Valve seat is made up of ceramic material with glass cylinder and PP screw cap.
- **Work with a Comprehensive Volume Range**
MICROLIT ULTIMUS is available in six unique volume ranges:
 1. 0.25-2.5 ml
 2. 0.5-5 ml
 3. 1-10 ml
 4. 2.5-30 ml
 5. 5-60 ml
 6. 10-100 ml**Refer to the specifications and ordering information.*
- **3 Years Manufacturer Warranty (With spare Parts)**

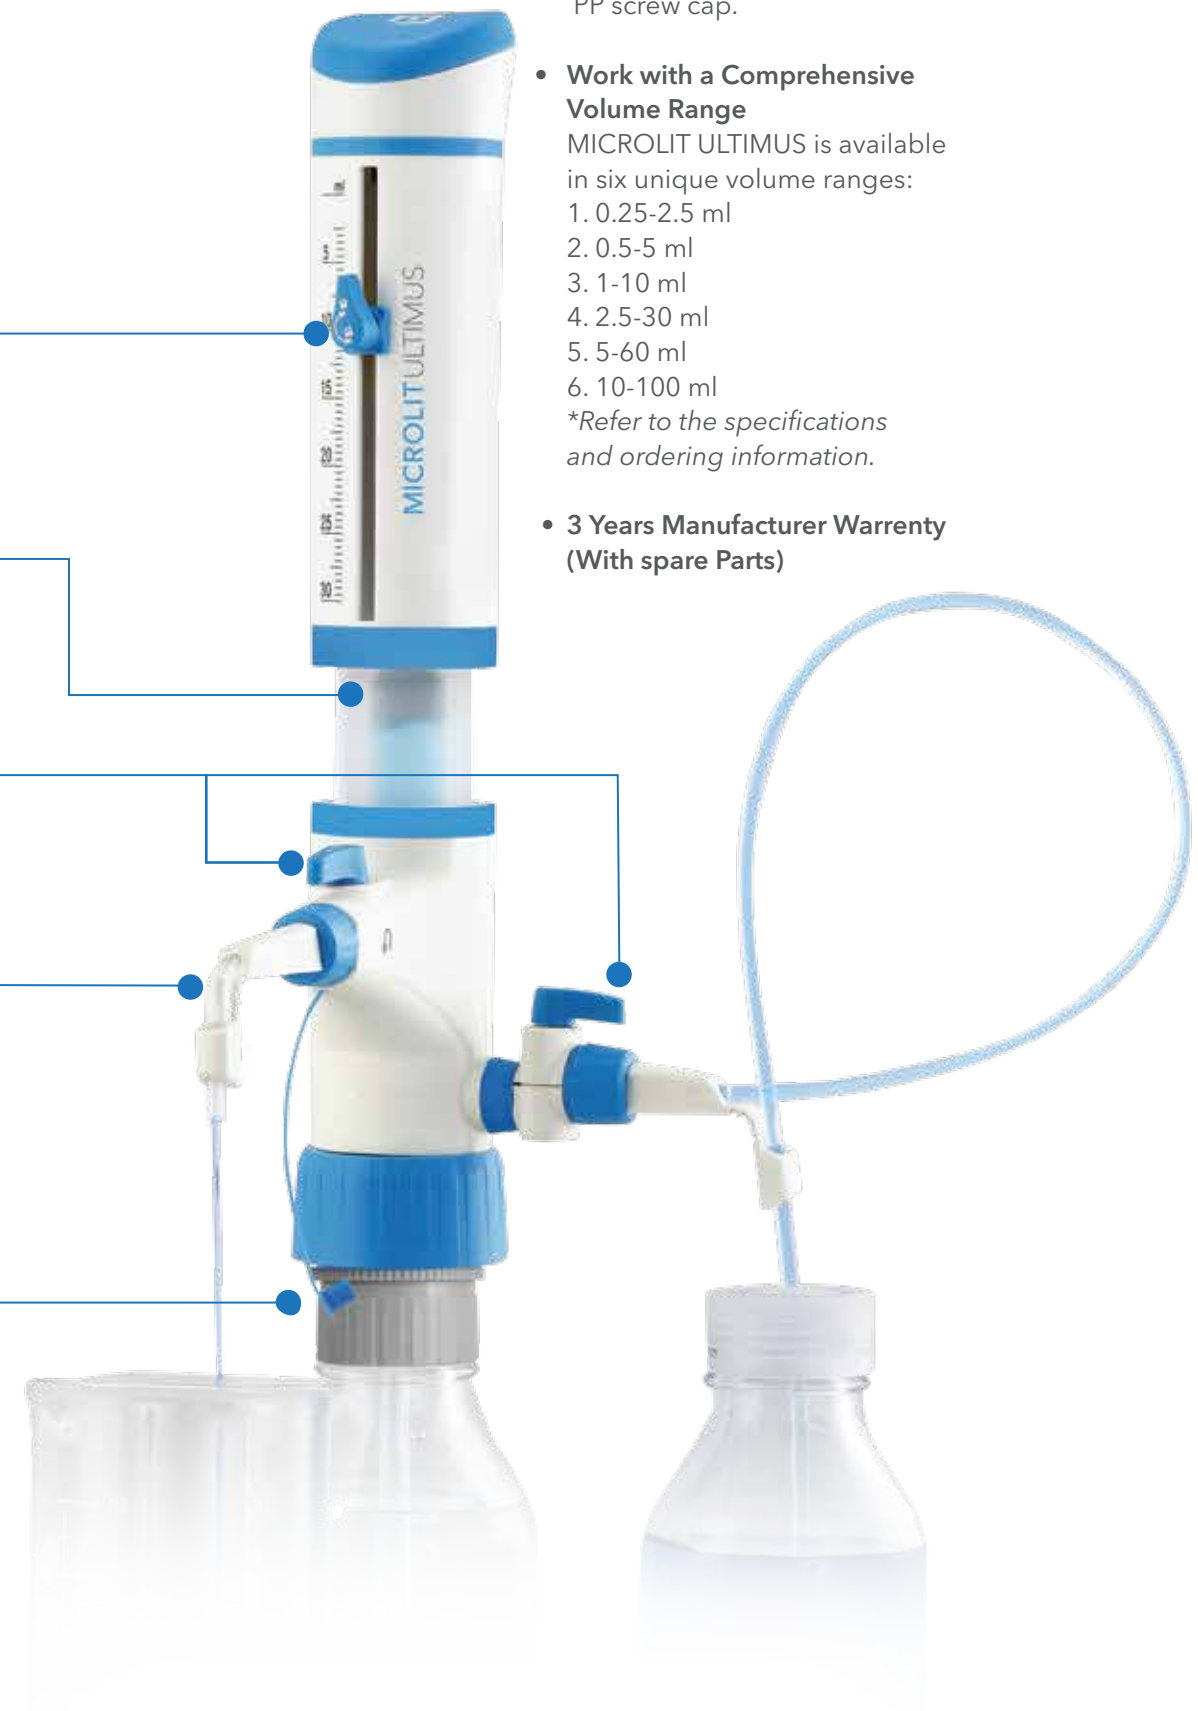


Enhance Your Productivity with Four Modes of Operation



1
Standard Dispensing
 Knob A - Open
 Knob B - Closed

In this mode, the dispenser dispenses the liquid normally into the receiver from the bottle it is mounted on.




2
Purging
 Knob A - Closed
 Knob B - Closed

In this mode, the liquid is re-circulated into the same bottle on which the dispenser is mounted. This process removes the air from the dispenser, without wasting any reagent.



3
Dilution/Rinsing/Second Liquid Dispensing
 Knob A - Open
 Knob B - Open

In this mode, the liquid from a second source can be dispensed into the receiver. The second liquid can be distilled water, thus allowing the user to rinse the instrument without dismounting it or dilute the reagent within the receiver.



4
Bottle Refilling
 Knob A - Closed
 Knob B - Open

In this mode, the liquid from a second source can be used to refill the bottle, without dismounting the dispenser.

Work with a Sophisticated Accessory Range that Enhances Flexibility



Adapters

The instrument comes with five adapters that comfortably fit most laboratory reagent bottles. The available sizes are – 28 mm, 32 mm, 38 mm, 40 mm and 45 mm.



Reservoir Covers

For the second bottle, an additional set of four reservoir covers are provided in the sizes, 32 mm, 36 mm, 40 mm and 45 mm.



Extendable Tube

MICROLIT ULTIMUS comes with a Telescoping Tube, that can be adjusted according to a variety of bottle sizes.

*MICROLIT ULTIMUS is highly resistant with usage of acids, alkalis, oxidizing and reducing agents along with organic solvent. please refer to our chemical compatibility chart for more details.

**ISO 8655 is the globally accepted industry standard for piston-operated volumetric apparatus. The evaluation was performed by trained and certified personnel at an ISO17025 accredited lab.

The precision and accuracy of our liquid handling instruments is twice better than industry standards.*

Assured Quality with ISO 8655 Conformed Calibration



MICROLIT ULTIMUS is calibrated in an ISO 17025 accredited laboratory according to ISO 8655 standards.

A calibration certificate is included inside the product package.

A calibration tool is also included for quick in-lab recalibration.

Award-winning Design and Product Excellence



14715346

E-2/549/2015/DEL (Pending)

Our products reflect the design philosophy of our organization, combining the best performance parameters with the best user experience.

We were honoured by **CII Industrial Innovation Awards** and adjudged a place in the **top 50 Most Innovative Companies of 2022**.

We are also accredited by a number of global organizations and have earned worldwide credibility.

SPECIFICATIONS AND ORDERING INFORMATION

Model No.	Vol. Range	Increment	Accuracy		CV	
			±%	±ml	±%	±ml
ULT-2.5	0.25-2.5 ml	0.05 ml	0.5	0.0125	0.1	0.005
ULT-5	0.5-5 ml	0.1 ml	0.5	0.025	0.1	0.010
ULT-10	1-10 ml	0.2 ml	0.5	0.050	0.1	0.010
ULT-30	2.5-30 ml	0.5 ml	0.5	0.150	0.1	0.030
ULT-60	5-60 ml	1.0 ml	0.5	0.300	0.1	0.060
ULT-100	10-100 ml	2.0 ml	0.5	0.500	0.1	0.100

The error limits (Accuracy and Coefficient of Variation) mentioned above are in accordance with the nominal capacity (or maximum volume) indicated on the instrument. The systematic error is $\pm 0.5\%$ for all volume ranges. These are obtained by using the instrument with distilled water at equilibrium, the ambient temperature of 20 °C while operating it smoothly and steadily. The error limits are in accordance with DIN EN ISO 8655-5.



OUR REACH



YOUR SATISFACTION IS OUR PRIORITY

Microlit products follow GMP norms and are manufactured under comprehensive QA (Quality Assurance) & QC (Quality Control). Our products reflect the design philosophy of our organisation combining the best performance parameters with the best user experience. However, if you are dissatisfied with the operation of any of our products, get in touch with us or call your nearest Microlit dealer for free replacement.

CONTACT US

★ **Microlit INDIA**

629 Pakramau, Kursi Road, Lucknow 226026, India
Phone: +91 9918625629, Email: info@microlit.com
www.microlit.com

★ **Microlit USA**

33 Wood Avenue South, Suite 600, Iselin, NJ 08830, USA
Phone: +1 732 321 0852, Email: info-usa@microlit.com
www.microlit.us

★ **Microlit LATAM**

Business Place Ibirapuera, 9th Floor, Number 93,
Alameda dos Jurupis 1005 - Moema,
Indianópolis São Paulo, Brasil CEP - 04088-000,
Phone: +55 11 93269-5932, Email: info-latam@microlit.com

Follow us

